



OCTOPUS TOTAL RESCUE SYSTEM


RESQTEC®

DEDICATED TO RESCUE, DEDICATED TO YOU

FOLLOW US HERE



OCTOPUS

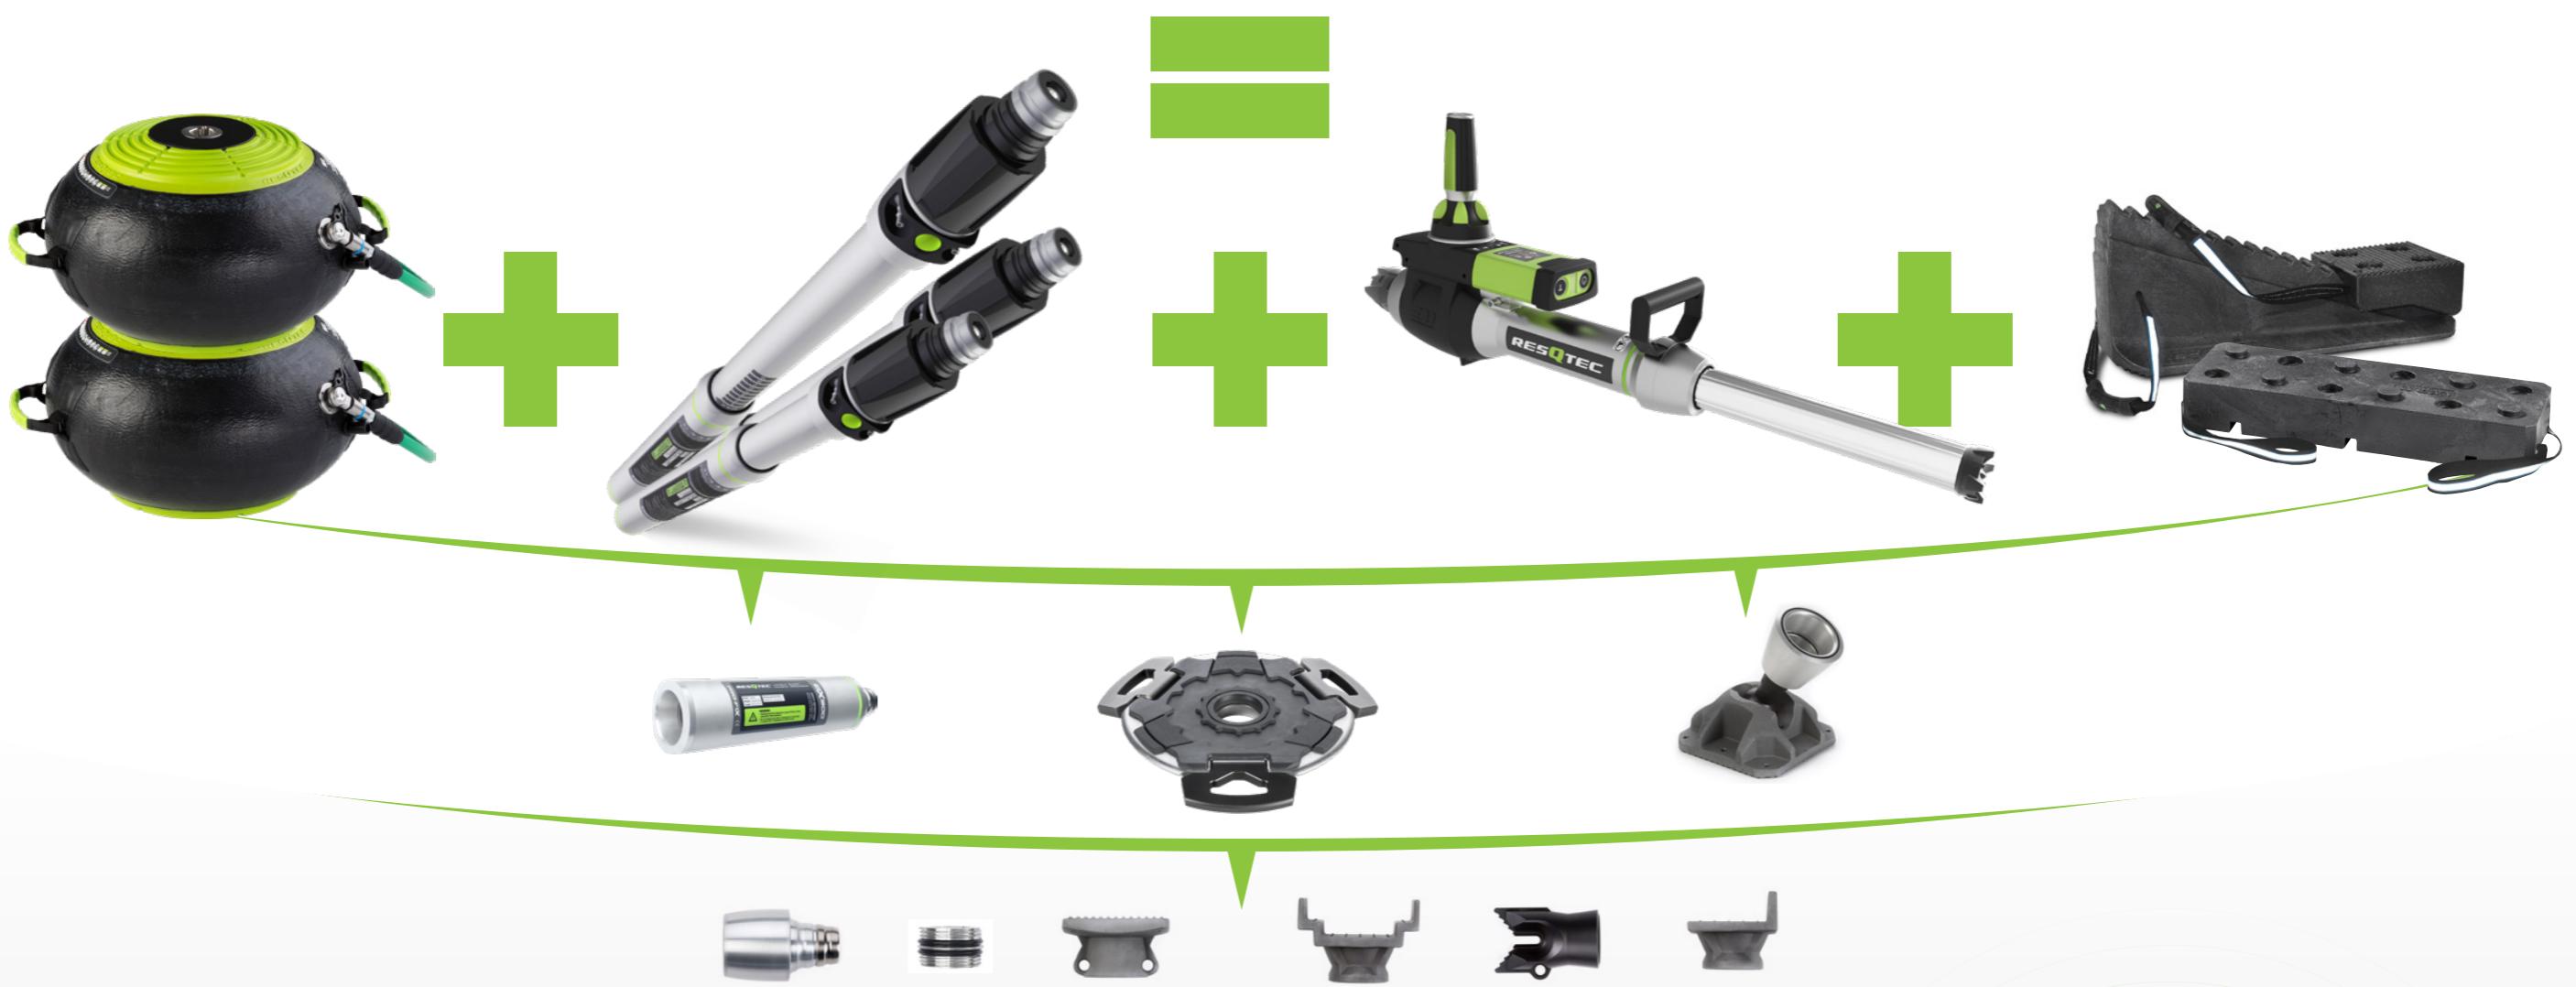

ONE SYSTEM, EVERY SCENARIO → ALWAYS AN ANSWER



SAVE TIME

Easy to use, modularity and unique technologies make them super-fast to deploy, saving crucial time.



SAVE SPACE

Do any scenario, from extrication to stabilizing to heavy rescue all with the same package.



SAVE COSTS

Simply less tools that do more.

JUST 4
TOOLS AND
A FEW
ADD-ONS!



STABILIZE

PROFIX

LIFTING

NT HYBRID

THE MOST VERSATILE SYSTEM WITH ENDLESS POSSIBILITIES



EDD RAMS

PUSHING

CRIBBING

CRIBBLOCKS

NT HYBRID

STRONGEST AND MOST VERSATILE YOU CAN GET

High performance rescue lifting bags that with their design provide incomparable capacity, height and multiuse in a lightweight package.



OVAL SHAPE

The oval shape achieved by advanced woven technology gives the NT Hybrid maximum capacity, height and stability throughout the whole lift.

3D WOVEN ARAMID FIBERS

NT Hybrid bags are made of multiple layers of aramid materials which is 6 times stronger than steel!

- Highest power to weight ratio
- High capacity and lifting height in one system
- Less bags needed which leads to space saving
- Lift pointed loads (such as axle of a truck) directly without loss of capacity
- Quickly stackable up to 3 bags for even more height and capacity
- Use combined or separate
- No need for cribbing saves time, is easy to use and increases safety
- Small connector in the Metal Core follows the Arc movement
- Useable capacity (14 tons) remains even at maximum lifting height
- Low insertion height


CONNECTABLE FOR HEIGHT

NT Hybrid bags can be connected for more height and capacity with a solid connector in the middle of the bag.

NT HYBRID

STRONGEST AND MOST VERSATILE YOU CAN GET

2:1
Achieve real performance with the NT Hybrid with the two in one system. With capacity and lifting height in one system it's the highest performing rescue lifting bag. There's no need for different bags anymore.



POWERPLATE

Use the NT Hybrid in combination with the Powerplate to lift even heavier and higher allowing to connect Cribbing blocks.


NO CRIBBING NEEDED

Due to the fact that NT hybrid can be connected, it is possible to eliminate cribbing all together.



POINTED LOADS

Due to the metal core NT Hybrid can lift pointed loads without loss of capacity or need for cribbing.

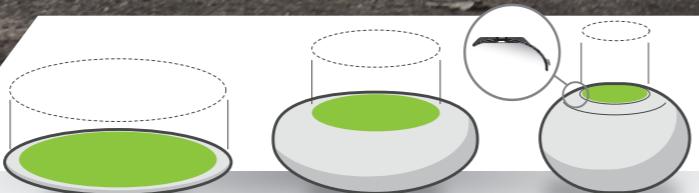


MAXIMUM CAPACITY OVAL SHAPE

The oval shape is the most optimum shape for a lifting bag; more surface area than any other shape together with more stability due to flat bottom and top. The oval shape is created by an advanced woven technology which results in zero stress points in the bag. It allows the bag to stay flat throughout the lift providing maximum capacity.



100% LIFTING CAPACITY METAL CORE

All fibers come together in the metal core; It prevents capacity loss and is capable of lifting pointed objects such as the axle of a truck or I-beams. The metal core delivers 100% lifting capacity at any time under any circumstance.

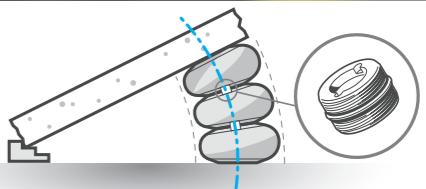

LIFT HIGHER WITH MORE STABILITY STABILITY CENTER

The connection in the middle of the metal core allows NT Hybrid to lift higher with more stability. For stability a bag needs to rotate with the object and that is exactly what the NT Hybrid does.

PROFIX MAX

MANUALLY, PNEUMATICALLY, HYDRAULICALLY, ELECTRICALLY.

Use the same strut with different attachments for rescue, vehicle stabilization, extrication and USAR. Easy to use with its unique automatic locking system. Just place it - DONE.

ADJUSTABLE COLLAR
Use the adjustable collar for pre tensioning and releasing.

ATTACHMENTS
Use the attachments on the ProFix to work in any scenario.

AUTOMATIC LOCKING SYSTEM
No pins or manual locking required.

PROFIX
SIMPLY THE BEST STRUT FOR ANY AND EVERY SCENARIO DUE TO ITS AUTOMATIC LOCKING SYSTEM AND HIGH CAPACITY; FROM EXTRICATION TO HEAVY RESCUE TO VEHICLE STABILIZATION.

- World's most powerful all-in-one strut
- High capacity: 15 ton capacity (x 4:1 safety = 60 tons)
- One strut, hundred applications for every situation such as trench, wall support and gantry
- Stepless and automatic locking system
- Compatible with more than 20 add-ons
- Pushing power with integration of a V-series ram
- From stabilization to lifting with a ram
- Full remote control with just one operator and a controlled release
- Connect the Profix to the PowerPlate for more stability on every surface

REMOTE CONTROLLED
work quicker, safer and controlled.

TRENCH / COLUMN GANTRY / WALL SUPPORT

ENDLESS POSSIBILITIES

The combinations are endless. Combine your kit and you are able to face every scenario. You will never need anything else. Our add-ons provide the solution you've been looking for.



COLUMN GANTRY


3 x 15 TONS AND A 4:1 SAFETY FACTOR

Not even the heaviest constructions are a challenge anymore.

By using the column gantry, you prevent a construction from collapsing and it provides stability and security.

WALL SUPPORT

Super steady and thorough, the wall support can give quick support in time limited operations. The automatic locking system allows quick and trouble free setup.

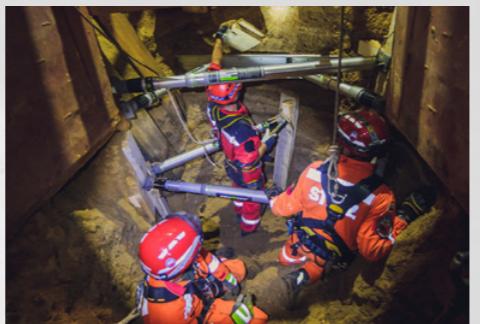

TRENCH

The Profix Max gives a trench construction ultimate stability. With Profix Max it doesn't become easier than that; pop it in place and it automatically locks. With high capacity you can be secured of the built structure.

PROFIX PODS

EXTRA AND ENDLESS APPLICATIONS. THE TRUE ENHANCEMENT TO YOUR OCTOPUS RESCUE SOLUTION.

The versatility of the Profix enhances your Octopus possibilities even more. Use our mono-, bi- and tripod with super innovative features for every scenario. Just one modular pod system with multiple applications for the right solution in every situation.



PROFIX PODS MONOPOD

The monopod can be super compact when used in confined spaces. When danger arises on a cliff or in a well, the monopod is the way to go.

BIPOD

The bipod is ideal for moving heavy objects. Also, it works very well when positioned at a cliff. Connect it with a strut and straps to ensure your casualty's safety. The bipod is perfect for moving heavy objects.



TRIPOD

For all your tripod needs, but with a lot more power. Let's say you have to lower a heavy object or even a heavily obese person. The tripod - built with Profix - won't let you down.



- For covering long distances
- Combine with extention and attachments
- 11,5 ton pushing force
- Connectable with ProFix for extra length
- Hydraulic or EDD RAM

V-SERIES RAM

MORE THAN ESSENTIAL FOR RESCUE

Never has a rescue tool been so versatile. From a dash roll, cross ramming, an oyster method to stabilization. Its compatibility and connectability make it the go-to tool when you need pushing power.



MULTI CONNECTOR

Use the Multi Connector to add another ram or connect it to the ProFix Max. Modularity and flexibility in optima forma.


CRIB BLOCKS

STACK, CONNECT, GO.

Stack and connect your cribbing blocks and you are good to go! Combine your blocks with the Power Plate for optimal safety and great performance. Essential to complete your rescue operation.

RAPID STAIR AND SADDLE WEDGE

Quickly stabilize and follow the load of an object during lifting or use it for quick stabilization during extrication.

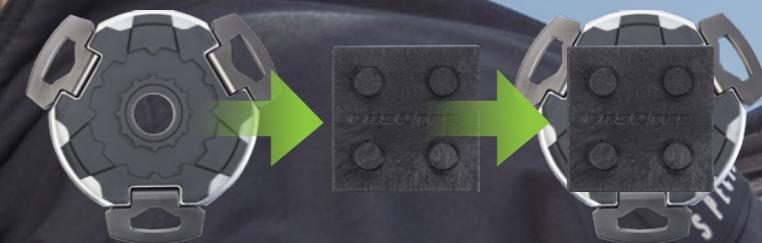

CRIB BLOCKS AND POWERPLATE

Compatible with the PowerPlate to connect the NT Hybrid.



CRIBBING BLOCKS

STACKABLE AND INTEGRATABLE IN EVERY RESCUE OPERATION. IT IS ESSENTIAL FOR ANY SCENARIO. ENDLESS COMBINATIONS, GREAT SUPPORT FOR LIFTING AND UNIQUE INTERLOCKING FEATURES.

- Creating a flat surface
- Lightweight
- 60 ton capacity
- Not absorbing
- Compatible with the PowerPlate to connect the NT Hybrid
- High durability, no cracking
- Stackable
- Made out of recycled plastic

LIFTING EQUIPMENT NT HYBRID



NT HYBRID 2

	NT HYBRID 2	NT HYBRID 4	NT HYBRID 8
Max. operating pressure	12 bar	12 bar	12 bar
Max. lifting capacity	26 tonnes	70 tonnes	156 tonnes
Max. lifting capacity at max. lifting height	6.2 tonnes	9.5 tonnes	14 tonnes
Insertion height	10 mm / 34 mm	10 mm / 48 mm	10 mm / 70 mm
Max. lifting height	N x 275 mm	N x 440 mm	N x 665 mm
Effective lifting height	N x 241 mm	N x 392 mm	N x 595 mm
Temperature range	-20°C till +65°C	-20°C till +65°C	-20°C till +65°C
Weight	6.5 kg	15.5 kg	38 kg
Safety factor	> 4	> 4	> 4

LIFTING EQUIPMENT NT HYBRID ACCESSORIES

		<p>HOSES AVAILABLE IN COLOURS RED, YELLOW, GREEN AND BLUE</p> <ul style="list-style-type: none"> Delivery hose 12 bar / 8m / rubber Delivery hose 12 bar / 10m Shut off hose 2m / rubber Shut off hose 2m 		

CRIBBING EQUIPMENT CRIBBLOCKS

	CB 40	CB 80	CB 600	WEDGE	SADDLE WEDGE	RAPID STAIR	CONNECTORS	TRANSPORT & STORAGE BOX
Dimensions (mm)	200 x 200 x 40	200 x 200 x 80	600 x 200 x 80	200 x 200 x 90	200 x 200 x 95	625 x 200 x 260	123 x 40 x 15	610 x 406 x 280
Weight (kg)	1.3	2.5	7.9	1.6	2.0	6.5	0.1	2.5

STABILIZATION EQUIPMENT PROFIX

PROFIX MAX

TOTAL RESCUE SOLUTION

The automatic locking system of the Profix Max makes shoring and stabilizing loads easy as breathing. Add the pneumatic functionalities of the Profix Max and every rescuer can operate the struts safely out of range.



PROFIX MAX	PXM 470	PXM 600	PXM880	PXM1400	PXM2300
Max. operating pressure	12 bar				
Weight	7.6 kg	8.8 kg	11.7 kg	17 kg	26 kg
Span	47 - 66.3 cm	60 - 91.4 cm	88 - 142.9 cm	140 - 238.6 cm	230 - 404.2 cm
Stroke cylinder + collar	14.4 + 5 cm	26.5 + 5 cm	50 + 5 cm	93.7 + 5 cm	169.3 + 5 cm
Total length retracted	58.6	71.6 cm	99.6 cm	151.6 cm	241.6 cm
Working load limit	147kN / 15 ton	88.3kN / 9 ton			

EXTENSIONS	EX150	EX300	EX600	EX900	EX1200	EX1500
Weight	1.8 kg	2.5 kg	4.1 kg	5.6 kg	7.2 kg	8.8 kg
Length	15.3 cm	30.3 cm	60.3 cm	90.3 cm	120.3 cm	150.3 cm
Working load limit ¹	147 kN / 15 ton					

¹safety factor 4:1

TRIPOD	BIPOD	MONOPOD
Total load capacity	10 ton	4 ton
Hoisting load capacity (center)	2 ton (center)	N/A
Total hoisting load capacity	4.4 ton	4 ton
EN 795-TYPE B	Compliant	Compliant
EN 16415-TYPE B	Compliant	Compliant

STABILIZATION EQUIPMENT ACCESSORIES

COLUMN GANTRY	MULTI TOOL	REMOTE CONTROLLER	REGULATOR 300 BAR INCL 2M FIXED INLET HOSE	RAPID RESCUE STRAP	HOSE 10M (X2)	EARTH NAIL	RAKER RAIL
RAKER RAIL CONNECTOR	PROFIX JUNCTION	RAKER RAIL HINGE	NAILING BLOCK	POWER PLATE	POWER PLATE PLUG	CONNECTOR KEY	SLEDGE HAMMER

HYDRAULIC EQUIPMENT RAM

neo1 TECHNOLOGY 350 bar WORKING PRESSURE			
	V2 RAM	V4 RAM	
Dimensions (L x W x H) ¹	481 x 205 x 252 mm	711 x 205 x 252 mm	1,014 x 205 x 252 mm
Maximum extended length ¹	788 mm	1,248 mm	1,548 mm
Maximum stroke ²	307 + 18 mm	537 + 18 mm	537 mm + 18 mm
Operational weight	10.6 kg	14.3 kg	17.6 kg
Max. spreading / pushing force	112 kN / 11.5 ton	112 kN / 11.5 ton	112 kN / 11.5 ton
EN 13204	R112/307-10.6	R112/537-14.3	R112/537-17.6
NFPA 1936	Compliant	Compliant	Compliant

¹ incl. detachable rear jaw. ²hydraulic stroke + added jaw

neo1 TECHNOLOGY 350 bar WORKING PRESSURE		
	V3T RAM	V5T RAM
Dimensions (L x W x H) ¹	340 x 205 x 268 mm	556 x 205 x 268 mm
Maximum extended length ¹	622 mm	1,270 mm
Maximum stroke ²	282 + 18 mm	714 + 18 mm
Operational weight	12.4 kg	18.7 kg
Max. spreading / pushing force (first stage)	203 kN / 20.7 ton	203 kN / 20.7 ton
Max. spreading / pushing force (second stage)	91 kN / 9.3 ton	91 kN / 9.3 ton
EN 13204	TR203/166-91/116-12.4	TR203/382-91/332-18.7
NFPA 1936	Compliant	Compliant

¹ incl. detachable rear jaw. ²hydraulic stroke + added jaw

HYDRAULIC EQUIPMENT RAM ACCESSORIES




³Limitations in use of accessories apply.

EDD EQUIPMENT V4 EDD

V4 EDD RAM	
Nominal input	43.2 VDC
Dimensions incl. detachable rear jaw (L x W x H)	636 x 133 x 355 mm
Max. extended length incl. detachable rear jaw	936 mm
Max. stroke	300 mm
Operational weight incl. battery pack 1 EDD	16.4 kg (± 0.2 kg)
Operational weight incl. power connector	15.8 kg (± 0.2 kg)
Weight excl. battery	15.4 kg (± 0.2 kg)
Spreading / pushing force	58.8 kN / 6.0 ton

¹ incl. detachable rear jaw.

EDD EQUIPMENT V4 EDD ACCESSORIES

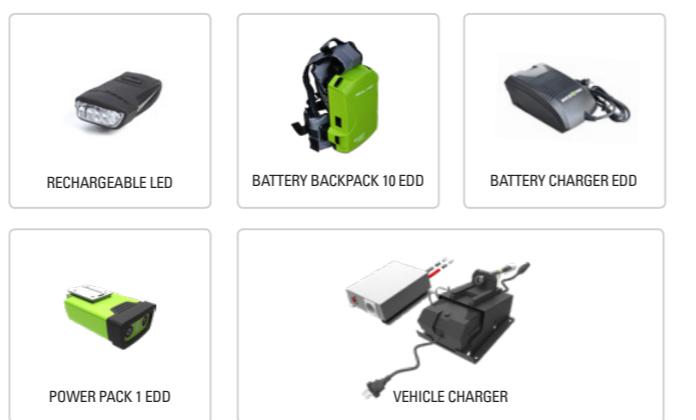

OCTOPUS SETS

OCTOPUS SETS

ITEM#	PRODUCT DESCRIPTION	OCTOPUS SET A 8480.1000	OCTOPUS SET B 8480.2000	OCTOPUS SET C 8480.3000
PROFIX MAX				
8410.0310.20	PXM 880	2		2
8410.0320.20	PXM 1400		2	2
8410.0510.20	EX-300	2		2
8410.0520.20	EX-600		2	2
8420.0060	POWER PLATE	2	2	4
8700.2075	POWER PLATE PLUG	2	2	4
8420.3550	MULTI SWIVEL	2	2	4
8420.0020	RHINO	2		2
8420.0000	CROWN		2	2
8461.0520	RAPID RESCUE SINGLE STRAP 6M	4		4
8461.4000	CLUSTER HOOK	2		2
8410.0600	MULTI TOOL	1	1	1
8410.0710.00	REMOTE CONTROLLER 12 BAR	1	1	1
8410.0851	HOSE, SET OF 2 (GREEN/BLUE)	2	2	2
8700.0570	REGULATOR C/W 2M BLACK RUBBER INLET HOSE	1	1	1
NT BAGS				
8508.0002	NT2 HYBRID C/W VALISE		2	2
8508.0004	NT4 HYBRID C/W VALISE	2	2	2
8508.0008	NT8 HYBRID C/W STORAGE CASE			2
8700.0795	ACCESSORY STORAGE CASE	1	1	2
8700.0570	REGULATOR C/W 2M BLACK RUBBER INLET HOSE	1	1	1
8700.0552	HANDHELD DUAL CONTROLLER 12 BAR	1	2	3
8700.2008	CONNECTOR KEY	1	1	2
8700.2050	SOLID QUICK CONNECTOR	1	2	5
8700.2075	POWER PLATE PLUG	1	2	3
8420.0060	POWER PLATE	1	2	3
8700.0715	FLOOR MAT	1	1	1
8700.2040	FLOOR MAT PLUG	1	1	1
8700.1107	DELIVERY HOSE 12 BAR/ 10M / RED	1	1	2
8700.1112	DELIVERY HOSE 12 BAR / 10M / YELLOW	1	1	2
8700.1122	DELIVERY HOSE 12 BAR / 10M / BLUE		1	1
8700.1117	DELIVERY HOSE 12 BAR / 10M / GREEN		1	1
8700.1258	SHUT-OFF HOSE 12 BAR / 2M / RED	1	1	2
8700.1263	SHUT-OFF HOSE 12 BAR / 2M / YELLOW	1	1	2
8700.1283	SHUT-OFF HOSE 12 BAR / 2M / GREEN		1	1
8700.1273	SHUT-OFF HOSE 12 BAR / 2M / BLUE		1	1
CRIBBING BLOCKS				
8400.0660	CB40	5	5	5
8400.0670	CB80	4	4	4
8400.0512	CB600 WITH STRAP	2	2	14
8400.0650	WEDGE	4	8	8
8400.0620	RAPID STAIR WITH STRAP	2	6	6
8400.0550	CONNECTOR	5	5	5
8400.0640	SADDLE WEDGE WITH STRAP	2	6	6
8400.0560	TRANSPORT & STORAGE BOX	1	1	1
V-SERIES RAM AND EDD				
ITEM#	PRODUCT DESCRIPTION	HYDRAULIC SET	EDD SET	
4540.2041.EE	V4 EDD RAM		1	
4540.2000.XX	V2 RAM	1		
8420.0230	RAM ADAPTER	1	1	
8420.0260	MULTI CONNECTOR	1	1	





NT BAGS SETS

ITEM#	PRODUCT DESCRIPTION	NT BAGS BASIC SET 8700.0145	NT BAGS BASIC SET NT2 8700.0135	NT BAGS BASIC SET NT4 8700.0140	NT LIFTING BAGS SET A 8500.0100	NT LIFTING BAGS SET B 8500.0110	NT LIFTING BAGS SET C 8500.0120	NT LIFTING BAGS USAR 8500.0090
8508.0002	NT2 HYBRID C/W VALISE	2	1	1	2			2
8508.0004	NT4 HYBRID C/W VALISE	1		2	1	2	4	2
8508.0008	NT8 HYBRID C/W STORAGE CASE							2
8700.0795	ACCESSORY STORAGE CASE	1	1	1	1	1	1	2
8700.0570	REGULATOR C/W 2M BLACK RUBBER INLET HOSE	1	1	1	1	1	1	1
8700.0552	HANDELD DUAL CONTROLLER 12 BAR	1	1	1	1	2	2	3
8700.2008	CONNECTOR KEY	1	1	1	1	1	1	2
8700.2050	SOLID QUICK CONNECTOR	1	1	1	1	2	2	5
8700.2075	POWER PLATE PLUG	1	1	1	1	2	2	3
8420.0060	POWER PLATE	1	1	1	1	2	2	3
8700.0715	FLOOR MAT	1	1	1	1	1	1	1
8700.2040	FLOOR MAT PLUG	1	1	1	1	1	1	1
8700.1107	DELIVERY HOSE 12 BAR / 10M / RED	1	1	1	1	1	1	2
8700.1112	DELIVERY HOSE 12 BAR / 10M / YELLOW	1	1	1	1	1	1	2
8700.1122	DELIVERY HOSE 12 BAR / 10M / BLUE					1	1	1
8700.1117	DELIVERY HOSE 12 BAR / 10M / GREEN					1	1	1
8700.1258	SHUT-OFF HOSE 12 BAR / 2M / RED	1	1	1	1	1	1	2
8700.1263	SHUT-OFF HOSE 12 BAR / 2M / YELLOW	1	1	1	1	1	1	2
8700.1283	SHUT-OFF HOSE 12 BAR / 2M / GREEN					1	1	1
8700.1273	SHUT-OFF HOSE 12 BAR / 2M / BLUE					1	1	1

PROFIX MAX SETS

ITEM#	PRODUCT DESCRIPTION	PROFIX MAX HEAVY RESCUE BASIC SET 8460.3000	PROFIX MAX HEAVY RESCUE EXTENDED SET 8460.3500	PROFIX MAX EXPERT SET 8450.6100	PROFIX MAX RAPID ALL-ROUND SET VEHICLE STABILIZATION SET
8410.0310.20	PXM 880	2		2	1
8410.0320.20	PXM 1400		2	2	
8410.0510.20	EX-300	2		2	1
8410.0520.20	EX-600		2	2	
8420.0060	POWER PLATE	2	2	4	
8700.2075	POWER PLATE PLUG	2	2	4	
8420.3550	MULTI SWIVEL	2	2	4	
8420.4000	MULTI SWIVEL WITH RINGHANDLE				1
8420.0020	RHINO	2		2	1
8420.0000	CROWN		2	2	
8461.0500	RAPID RESCUE SINGLE STRAP 6M	4		4	
8461.1000	RAPID RESCUE DOUBLE STRAP 3M				2
8461.4000	CLUSTER HOOK				2
8461.4000	CLUSTER HOOK	2		2	2
8410.0600	MULTI TOOL	1	1	1	
8462.0300	RAPID STABILIZATION BAG				1

PROFIX MAX SETS

ITEM#	PRODUCT DESCRIPTION	PROFIX MAX TRENCH BASIC SET 8460.4000	PROFIX MAX TRENCH SET 8460.5000
8410.0290.00	PXM 470	6	12
8410.0500.20	EX-150	4	6
8410.0510.20	EX-300	4	6
8410.0520.20	EX-600	4	6
8410.0530.20	EX-900	4	6
8420.3550	MULTI SWIVEL	6	8
8420.0300	FIXED BASE	12	16
8410.0600	MULTI TOOL	1	1

PROFIX MAX SETS

ITEM#	PRODUCT DESCRIPTION	PROFIX MAX USAR SET A 8460.6000	PROFIX MAX USAR SET B 8460.7000	PROFIX MAX USAR SET C 8460.8000
8410.0290.00	PXM 470	2	4	6
8410.0300.20	PXM 600	2	4	6
8410.0310.20	PXM 880	2	4	6
8410.0320.20	PXM 1400	2	4	6
8410.0330.20	PXM 2300		4	6
8410.0500.20	EX-150		2	6
8410.0510.20	EX-300	2	2	6
8410.0520.20	EX-600		2	6
8410.0530.20	EX-900	2	2	6
8410.0540.20	EX-1200		2	6
8420.0060	POWER PLATE	2	4	12
8700.2075	POWER PLATE PLUG	2	4	12
8420.3550	MULTI SWIVEL	2	4	16
8420.0300	FIXED BASE	2	4	16
8420.0020	RHINO	2	4	4
8420.0000	CROWN	2	4	4
8420.0210	BEAM SUPPORT	2	4	12
8420.0190	EDGE SUPPORT	2	4	6
8461.0500	RAPID RESCUE SINGLE STRAP 6M	4	8	8
8461.2000	STRAP EXTENSION 3M	2	4	4
8461.3000	AXLE STRAP 1M	2	4	4
8461.4000	CLUSTER HOOK	2	4	4
8410.0600	MULTI TOOL	1	1	1
9800.9320	SLUDGE HAMMER			1
8430.0380	COLUMN GANTRY			4

OPTIONAL SETS FOR PROFIX MAX SETS

ITEM#	PRODUCT DESCRIPTION	PROFIX MAX AIRSET ** 8460.9000	PROFIX MAX HYDRAULIC SET 8460.9100	PROFIX MAX WALL SUPPORT SET 8460.9200
8410.0710.00	REMOTE CONTROLLER	1		
8410.0851	HOSE, SET OF 2 (GREEN/BLUE)	2		
8700.0570	REGULATOR C/W 2M BLACK RUBBER INLET HOSE	1		
4520.2000.XX	V2 RAM		1	
8420.0230	RAM ADAPTER		1	
8420.0260	MULTI CONNECTOR		1	
8430.0070	RAKER RAIL 1500			4
8430.0180	RAKER RAIL HINGE			4
8430.0120	RAKER RAIL CONNECTOR			2
8430.3650	NAILING BLOCK			4
8430.0240	PROFIX JUNCTION			2

** NOTE: THE AIRSET KIT IS NECESSARY TO OPERATE THE PROFIX MAX SETS

PODS SETS

ITEM#	PRODUCT DESCRIPTION	PROFIX MAX MONOPOD SET 8420.2450	PROFIX MAX BIPOD SET 8420.2470	PROFIX MAX TRIPOD SET 8420.0610
8420.0600	TRIPOD HEAD			1
8420.2600	BIPOD HEAD			1
8420.2650	MONOPOD	1		
8420.4000	MULTI SWIVEL WITH RINGHANDLE	1	2	3
8420.2558	CHAIN W/HOOKS & SHORTENER 4M		2	3

CRIB BLOCK SETS

ITEM#	PRODUCT DESCRIPTION	CB SET C2 8400.0733	CB SET C4 8400.0734	CB SET C6 8400.0735	CB SET C8 8400.0736	CB SET 600-1 8400.0722	CB SET 600-2 8400.0724
<tbl_info



RESQTEC®

DEDICATED TO RESCUE, DEDICATED TO YOU

EUROPEAN OFFICE

Meer en Duin 82
2163 HC Lisse, the Netherlands
T +31 (0)252 419002
F +31 (0)252 411794

USA OFFICE

300 Forge Way, Suite 2
Rockaway, New Jersey, 07866
T +1 973 627 4646
F +1 973 627 4622

ASIA OFFICE

Lot 5, Jalan Delima 1/1, Subang Hi-Tech Industrial Park
47 500 Selangor, Malaysia
T +603 5621 5298
F +603 5621 2895

Copyright All of the information and material inclusive of text, images, logos, product names is either the property of, or used with permission by Resqtec. The information may not be distributed, modified, displayed, reproduced – in whole or in part – without the prior written permission by Resqtec.

Trademarks Resqtec, its logos and other Resqtec products and services referenced herein are trademarks of Resqtec, and may be registered in certain jurisdictions. All other product names, company names, marks and logos referenced may be trademarks of their respective owners. Hurst and Jaws of Life are the registered trademarks of Hurst Jaws of Life, Inc.

Disclaimer All information herein was carefully gathered and examined. However, we cannot be held responsible for eventual mistakes or incompleteness. Resqtec may exercise the right to change or modify parts at any time without notification. The content may be subject to error, revision and technical modifications. Resqtec accepts no liability for the consequences of activities undertaken based on the contents.