
## CO<sub>2</sub>-FILLING UNITS

| KUD1<br>KU3 / KUD3 / KUS3<br>KU4 / KUD4 / KUS4<br>KU5-DI / KUD5-DI / KUS5-DI / KUS5-LW<br>KU6-DI / KUD6-DI / KUS6-DI | 60<br>61<br>62 - 63<br>64 - 65<br>66 - 67 |
|--|---|
| KUD6-DI-N <sub>2</sub> · KUD6-DI-N <sub>2</sub> PROTECT<br>KU6/HF505RS   | 68<br>69                                  |
| CONTOL STATION CO <sub>2</sub> -BS-2W  | 70  |
| CO <sub>2</sub> -PLUNGER PUMP EM130  | 71  |
| CO <sub>2</sub> -RECYCLING UNIT KR04   | 72 - 73                                   |

## **ACCESSORIES**

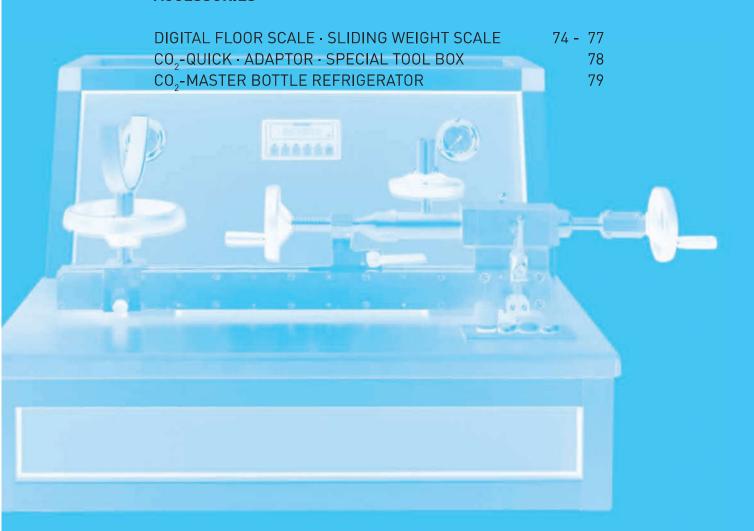

The KUD1 is a small mobile  $\mathrm{CO}_2$ -filling unit to fill  $\mathrm{CO}_2$  directly on the spot. For Filling  $\mathrm{CO}_2$ -bottles from 150 g up to 45 kg in combination with a Digital Floor Scale (not included-optional). It is especially appropriate for service offices and service vehicles to fill  $\mathrm{CO}_2$  directly on-site.

#### The unit is equipped with:

- » 1 compressed-air driven pump
- $\Rightarrow$  2 pcs.  $CO_2$ -hose (160 bar)
- » Pressure reducer
- » Compressed-air hose



The KU3 is a compact, mobile  $\rm CO_2$ -filling unit. It is especially appropriate for service offices and service vehicles to fill  $\rm CO_2$  directly on-site.

#### The unit is equipped with:

- $\Rightarrow$  2 pcs.  $CO_2$ -hose (160 bar)
- » Pressure gauge (160 bar)
- » Electric cable 230 V



### **TECHNICAL DATA**

KU3 (No. 251 000)

Construction: steel construction with sheet casing

Pump: 3-piston-pump

Motor: 230 V, 16 A

Weight: approx. 34 kg

Capacity: max. 3.5 kg/min

Dimensions (l x w x h): approx. 550 x 400 x 340 mm

Colour: hammer finish painted blue or silvergrey



#### **TECHNICAL DATA**

#### KUD3 (air compressed) (No. 203 000)

Construction: aluminium

Motor: Compressed-air driven 8 – 10 bar

Weight: approx. 25 kg
Capacity: max. 3.5 kg/min

Dimensions ( $l \times w \times h$ ): approx. 550 x 400 x 340 mm

Colour: hammer finish painted blue or silvergrey

#### **TECHNICAL DATA**

#### KUS3 (No. 231 000)

Construction: aluminium
Pump: 3-piston-pump
Motor: 380 V, 12 A
Weight: approx. 36 kg
Capacity: max. 3.5 kg/min

Dimensions (l x w x h): approx. 550 x 400 x 340 mm

Colour: hammer finish painted blue or silvergrey




## ${\rm CO_2}$ -filling unit, model KUD4 for filling ${\rm CO_2}$ -bottles from 150 g up to 45 kg.

#### Unit consists of:

- » Steel casing
- » Compressed-air driven pump
- » Electrical switchboard
- » Safety valve
- » Wiring
- » CO<sub>2</sub>-filter

#### Control panel consists of:

- » CO<sub>2</sub>-inlet pressure gauge
- » CO<sub>2</sub>-outlet pressure gauge
- » Relief ball valve
- » CO<sub>2</sub>-filling ball valve
- » Control buttons

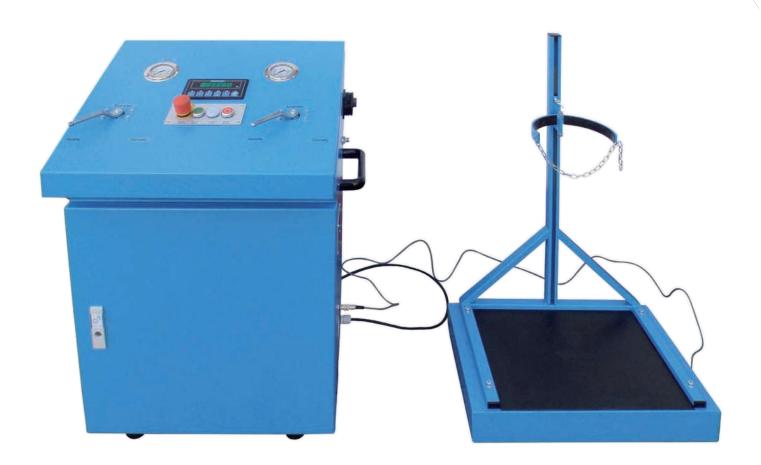

CO<sub>2</sub>-Filling Units · KU4 · KUD4 · KUS4

No. 253 000

## **TECHNICAL DATA**

KU4 (No. 203 000)

Capacity: max. 4.5 kg/min
Motor: 230 V, 50 Hz

Dimensions ( $l \times w \times h$ ): approx. 500 x 700 x 1000 mm

Colour: hammer finish painted blue or silvergrey

Weight: approx. 59 kg

## **TECHNICAL DATA**

KUD4 (No. 205 000)

Capacity: max. 4.5 kg/min

Motor: compressed-air driven 8 – 10 bar
Dimensions (l x w x h): approx. 500 x 700 x 1000 mm

Colour: hammer finish painted blue or silvergrey

Weight: approx. 45 kg

## **TECHNICAL DATA**

KUS4 (No. 233 000)


Capacity: max. 4.5 kg/min
Motor: 3 phase, 400V, 50 Hz


Dimensions ( $l \times w \times h$ ): approx. 500 x 700 x 1000 mm


Colour: hammer finish painted blue or silvergrey

Weight: approx. 65 kg

 ${\rm CO_2}$ -filling unit KUD5Di suitable to fill any size, shape or make of  ${\rm CO_2}$ -cartridges (from 20 g) and  ${\rm CO_2}$ -bottles (up to 6 kg) with the universal filling head.

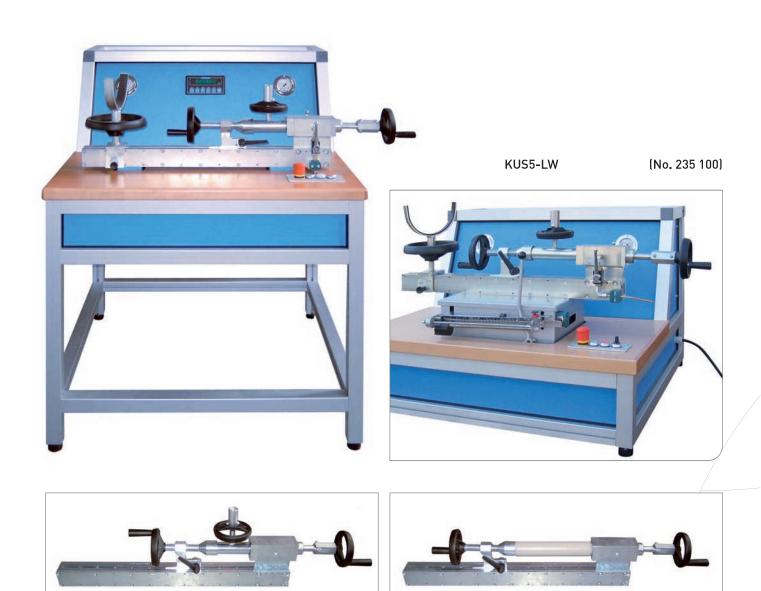

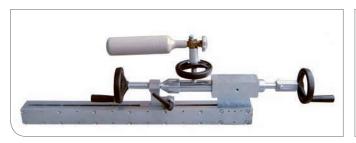



#### The unit is equipped with:

- » Compressed-air driven CO<sub>2</sub>-pump
- » Integrated digital scale up to 30 kg weighing range with automatic cut-off feature. Resolution 10 g or optional
- » Filling of large bottles more than 6 kg has to be carried out on a separate floor scale with automatic cut-off feature (optional accessory)

#### Optional available at extra charge:

- » Equipped with mechanical sliding weight scale
- » Electric supply with 230/380 V, 60 Hz
- » Equipped with label printer

#### **TECHNICAL DATA**

#### KU5-DI (No. 255 000)

Motor: 230 V, 50 Hz

Dimensions ( $l \times w \times h$ ): approx. 900 x 700 x 600 mm

Colour: hammer finish painted blue or silvergrey
Standard accessories: » 3 adaptors for filling of CO<sub>2</sub> cartridges,

3 adaptors for filling of CO<sub>2</sub> cartridges,
 18 mm, 25 mm and 32 mm diameter

» 1 CO, high-pressure hose, 2 m

» 1 rotary filling valve "DF 1" to fill CO2-bottles

» 1 height adjustable support, KS-6

» 1 metal box incl. hexagonal sockets and tools, 10 – 32 mm

» 1 set of sealings for filling adaptors

» CO, steel filter

#### **TECHNICAL DATA**

#### KUD5-DI (No. 207 000)

Motor: compressed-air from 8 bar 800 ltr. air/min

Dimensions ( $l \times w \times h$ ): approx. 900 x 700 x 600 mm

Colour: hammer finish painted blue or silvergrey

Standard accessories: 3 adaptors for filling of  $CO_2$ -cartridges, 18 mm, 25 mm and 32 mm diameter

» 1 CO, high-pressure hose, 2 m

» 1 rotary filling valve "DF 1" to fill CO<sub>2</sub>-bottles

» 1 height adjustable support, KS-5

» 1 metal box incl. hexagonal sockets and tools, 10 - 32 mm

» 1 set of sealings for filling adaptors

» CO<sub>2</sub>-steel filter

#### **TECHNICAL DATA**

#### KUS5-DI (No. 235 000)

Motor: 380 V, 50 Hz

Dimensions (LxBxH): ca. 900 x 700 x 600 mm

Colour: hammer finish painted blue or silvergrey
Standard accessories: 3 adaptors for filling of CO<sub>o</sub>-cartridges,

3 adaptors for filling of CO<sub>2</sub>-cartridges,
 18 mm, 25 mm and 32 mm diameter

» 1 CO, high-pressure hose, 2 m

» 1 rotary filling valve "DF 1" to fill CO<sub>2</sub>-bottles

» 1 height adjustable support, KS-5

» 1 metal box incl. hexagonal sockets and tools, 10 – 32 mm

» 1 set of sealings for filling adaptors

» CO<sub>2</sub>-steel filter




## No. 256 000 · CO<sub>2</sub> -Filling Units · KU6-DI

 $\rm CO_2$ -filling unit KU6 suitable to fill any size, shape or make of  $\rm CO_2$ -cartridges (from 20 g) and  $\rm CO_2$ -bottles (up to 6 kg) with the universal filling head.  $\rm CO_2$ -unit with integrated digital scale 30 kg in table form with 40 mm thick wooden board.







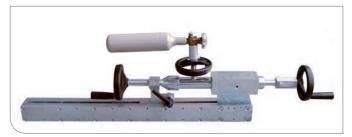



#### The unit is equipped with:

- » Silent directly flanshed CO<sub>2</sub>-pump
- » Filling speed control for slow filling of cartridges and fast filling of large bottles
- » Fine regulation for small cartridges
- Fast filling for large cylinders
- » Digital scale (30 kg weighing range) with automatic cutoff feature resolution 5 g or 10 g optional
- » Operation by electrovalves
- » Filling of large bottles more than 6 kg has to be carried out on a separate floor scale with automatic cut-off feature (scale not included)
- » No pre-cooling system for  $CO_2$  source bottle required
- » Emptying of  $CO_2$  master bottle up to 95%

#### Optional available at extra charge:

- » Digital scale (30 kg weighing range) with automatic cut-off feature: resolution: 2 g or 5 g
- » Electric supply with 230/380 V,
- » Equipped with label printer

#### **TECHNICAL DATA**

#### KU6-DI (No. 256 000)

Capacity: max. 5 kg/min
Operating pressure: max. 130 bar
Safety valve: 130 bar
Motor: AC 230 V. 50 Hz

Dimensions (l x w x h): approx. 1000 x 750 x 850 mm

Colour: hammer finish painted blue or silvergrey

Standard accessories: » 3 adaptors for filling of CO<sub>2</sub>-cartridges, Ø 18 mm, 25 mm and 32 mm

» 1 CO, high-pressure hose, 2 m

» 1 rotary filling valve "DF 1" to fill  $\mathrm{CO_2}$ -bottles

» 1 height adjustable support, KS-6

» 1 metal box incl. hexagonal sockets and tools, 10 – 32 mm

» 1 set of sealings for filling adaptors

» CO<sub>2</sub>-steel filter

#### **TECHNICAL DATA**

#### KUD6-DI (No. 209 000)

Capacity: max. 5 kg/min

Operating pressure: max. 130 bar

Safety valve: 130 bar

Motor: AC 230 V, 50 Hz

Air pressure: 8-10 bar 800 l/Air/min

Dimensions (l x w x h): ca. 1000 x 750 x 850 mm

Colour: hammer finish painted blue or silvergrey

Standard accessories: » 3 adaptors for filling of CO<sub>2</sub>-cartridges, Ø 18 mm, 25 mm and 32 mm

» 1 CO<sub>2</sub> high-pressure hose, 2 m

» 1 rotary filling valve "DF 1" to fill CO<sub>2</sub>-bottles

» 1 height adjustable support, KS-6

» 1 metal box incl. hexagonal sockets and tools, 10 – 32 mm

» 1 set of sealings for filling adaptors

» CO,-steel filter



#### **TECHNICAL DATA**

#### KUS6-DI (No. 237 000)

Capacity: max. 5 kg/min
Operating pressure: max. 130 bar
Safety valve: 130 bar

Motor: 3 phase 400 V, 50 Hz Dimensions (l x w x h): ca. 1000 x 750 x 850 mm

Colour: hammer finish painted blue or silvergrey

Standard accessories: 3 adaptors for filling of CO<sub>2</sub>-cartridges, Ø 18 mm, 25 mm and 32 mm

» 1 CO, high-pressure hose, 2 m

» 1 rotary filling valve "DF 1" to fill CO2-bottles

» 1 height adjustable support, KS-6

» 1 metal box incl. hexagonal sockets and tools, 10 – 32 mm

» 1 set of sealings for filling adaptors

» CO<sub>2</sub>-steel filter



## No. 261 000 · CO<sub>2</sub>-Filling Units · KUD6-DI-N<sub>2</sub>

Combined filling unit for Carbon Dioxide  $(CO_2)$  and Nitrogen  $(N_2)$  for small cartridges fire extinguishers and cylinders of all makes and sizes with the FRITZ EMDE universal filling rail.

#### The unit is equipped with:

- » digital scale (resolution 5 g) with automatic cut-off
- » Compressed-air driven CO<sub>2</sub>-pump
- » Compressed-air driven N<sub>2</sub>-pump
- » Filling speed regulator
- » Electrically relief valve
- » Universal FRITZ EMDE filling rail
- » CO<sub>2</sub>-filter
- » Safety valve (130 bar)

#### Standard accessory:

- $^{\rm w}$  3 adaptors for  ${\rm CO_2}$ -cartridges: 18 mm, 25 mm und 32 mm
- » 1 CO<sub>2</sub>-High-Pressure hose 2 m
- » 1 DF1-adaptor for filling of CO<sub>2</sub>-cylinders
- » 1 KS 5 support
- » 1 set of socket wrenchs, 10 32 mm
- » 1 CO<sub>2</sub>-steel filter











#### **TECHNICAL DATA**

Filling capacity CO2: max. 5 kg/min
Working pressure: max. 130 bar
Safety valve: 130 bar

Motor: 230 V, 10 A, 50 Hz

Dimension ( $l \times w \times h$ ): approx. 1300 x 750 x 1250 mm

Working height: 850mm

Colour: hammer finish painted blue

#### Accessories available at extra charge:


- » Floor scale with automatic cut-off 200 kg, 20 g resolution display integrated in filling unit scale platform approx. 600 x 400 mm incl. cylinder bracket
- » CO<sub>2</sub>-QUICK fast filling adaptor
- » Raisable safety guard for filling rail
- » Label printer



Combined filling unit, model KU6/HF505RS to fill any size and type of CO2, Halon 1211 (BCF) and Halon 1301 (BTM-cartridges, extinguishers and big bottles with the universal filling rail).

#### The unit is equipped with:

- » Silent 3-piston dosing pump for CO<sub>2</sub>
- » Self-sucking Halon 1301 (BTM) fluid pump with an emptying capacity up to 85%
- » Digital scale (30 kg with 10 g resolution) with automatic cut-off feature
- » Filling of large bottles more than 6 kg has to be carried out on a separate floor scale with automatic cut-off feature (scale not included)
- » No pre-cooling system for CO<sub>2</sub> source bottle required

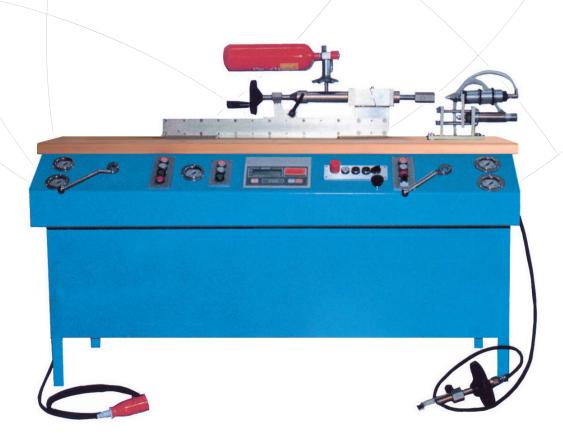

## **TECHNICAL DATA**

 $\begin{array}{ll} {\sf Capacity} \ {\sf CO}_2 \hbox{:} & {\sf max.} \ 4.2 \ {\sf kg/min} \\ {\sf Operating} \ {\sf pressure} \ {\sf CO}_2 \hbox{:} & 130 \ {\sf bar} \\ {\sf Capacity} \ {\sf Halon:} & {\sf max.} \ 20 \ {\sf kg/min} \end{array}$ 

Operating pressure Halon: 40 bar

Motor: AC 230 V, 16 A, 50 Hz
Dimensions (l x w x h): approx. 1600 x 750 x 850 mm

Colour: hammer finish painted blue or silvergrey

#### Accessories available at extra charge:

- » Halon 1301 (BTM) gas pump for emptying capacity up to 98%
- » Pneumatic screwer
- » Digital scale with 5 g resolution
- » Digital floor scale, 150 kg, 50 g resolution



# The $\rm CO_2$ -control station, model $\rm CO_2$ -BS-2W is designed for quick, precise und economic filling of $\rm CO_2$ -cylinders out of a tank with cryogenic Carbon Dioxide.

The alternating use allows the user to fill the effective filling time of the cylinder with preparation and post-processing work. Therefore there are no unit down-times during the filling process. The control of the filling valves works automatically. The control station has to be used in combination with the  $\rm CO_2$ -transfer pump EM-130 and the cryogenic Carbon Dioxide tank.

#### The unit is equipped with:

- » 2 pcs. digital floor scales, 200 kg, 50 g resolution with automatic cut-off feature
- » 2 pcs. pneumatic clamping devices for steel cylinders
- » 2 pcs. isolated CO<sub>2</sub>-filling hose, lenght 2000 mm
- » 2 pcs. EMDE-CO<sub>2</sub>-QUICK adaptors
- » 1 pc. safety valve 103 bar
- » 2 pcs. pressure gauges



#### **TECHNICAL DATA**

Dimension ( $l \times w \times h$ ): approx. 3000  $\times$  600  $\times$  1200 mm

Compressed-air: 6 bar

Motor: 230 V, 50 Hz, 5 A

Colour: hammer finish painted blue

The EM130 is a  $\mathrm{CO_2}$ -plunger pump designed to fill small and medium scale cylinder from bulk liquid  $\mathrm{CO_2}$  storage vessels or to transfer liquid  $\mathrm{CO_2}$  from one cylinder to another. Where a bulk liquid  $\mathrm{CO_2}$ -tank is used as a supply source, refrigeration is required in the tank. It may also be used where a High-Pressure source of liquid  $\mathrm{CO_2}$  is required for a particular process.

The EM130 pump is CE marked to comply with European Unitry Directive 98/37/EC and low Voltage Directive 73/23/EC. Recharging Units comply with Pressure Equipment Directive 97/23/EC.





## **TECHNICAL DATA**

 $CO_2$  transfer capacity: (fluid at -17°C) 300 kg/hr

Max. pressure:103,5 barSuction connection:R½Pump speed:400 rpmElectric motor:2.2 kWMotor speed:1420 rev/min

Electricity supply: 400 V AC 50 Hz 3 phase Weight: Net 91 kg / Gross 105 kg Dimensions ( $l \times w \times h$ ): 970  $\times 490 \times 850$  mm

The Kyoto Protocol of the United Nations Framework Convention on Climate Change is an amendment to the international treaty on climate change, assigning mandatory emission limitations for the reduction of greenhouse gas emissions to the signatory nations.

The reduction of greenhouse gas, particularly  $\mathrm{CO}_2$  will play a decisive role in the future. You have the change to make a contribution to our climate, by utilize the FRITZ EMDE  $\mathrm{CO}_2$ -Recycling Unit, KR04 to reduce the greenhouse effect.



#### **TECHNICAL DATA**

Motor: 230 V, 50 Hz, 10 A

Filling capacity:  $CO_2$  fluid: approx. 15 l/min

CO, gaseous: approx. 6 l/min

Compressed-air: 6 - 8 bar
Weight: approx. 70 kg
Safety valve: 130 bar
Evacuation: up to 7 bar

Dimension ( $l \times w \times h$ ): approx. 1000 x 500 x 1000 mm (without floor scale)

Colour: hammer finish painted blue

#### The unit is equipped with:

- » safety valve 130 bar
- » CO<sub>2</sub>-filter
- » floor scale 200 kg with digital display
- » manual ball valve for relief
- » inlet and filling gauge
- » CO<sub>2</sub>-hoses 2 m each

#### Accessories available at extra charge:

- » CO<sub>2</sub>-QUICK adaptor
- » CO<sub>2</sub>-cartridge device fort he emptying of cartridges




When discharging of the cylinder 99% of the carbon dioxide is recaptured. Germany is precursor in the climate protection with the climate protection technology of FRITZ EMDE products.

## "Made in Germany"

7 bar. Therefore it is consequently quaranteed that no CO<sub>2</sub> disappears in the environment.

weight the KR04 cuts off automatically.







#### Accessories - DIGITAL FLOOR SCALE

#### Digital floor scale, model 36K 10 (No. 100 550)

Without automatic cut-off. Weighing board made from high quality steel.



Digital floor scale, model 60K 20L

(No. 100 540)

## **TECHNICAL DATA**

Weighing range: 36 kg
Resolution: 10 g

Dimensions: 315 x 305 mm

## **TECHNICAL DATA**

Weighing range: 60 kg
Resolution: 20 g

Dimensions: 522 x 403 mm

Digital floor scale, model 150K 50 (No. 100 510) Digital floor scale model 150K 50XL (No. 100 515)

## **TECHNICAL DATA**

Weighing range: 150 kg Resolution: 50 g

Dimensions: 315 x 305 mm

## **TECHNICAL DATA**

Weighing range: 150 kg
Resolution: 50 g

Dimensions: 650 x 500 mm

#### Accessories - DIGITAL FLOOR SCALE

#### Digital floor scale, model BW150 20XL

(No. 100 520)

With integrated cylinder support without automatic cut-off.

#### Accessories available at extra charge:

- » Tool box
- » CO<sub>2</sub>-hose 2 m
- » CO2-QUICK Adaptor



## **TECHNICAL DATA**

Weighing range::

150 kg

Resolution:

20 g

Dimensions:

565 x 450 mm

#### Digital floor scale, model BW200 50XL

(No. 100 530)

With integrated cylinder support and automatic cut-off.

#### Accessories against surcharge:

- » Tool box
- » CO<sub>2</sub>-hose 2 m
- » CO<sub>2</sub>-QUICK Adaptor

## **TECHNICAL DATA**

Weighing range:

200 kg

Resolution:

50 g

Dimensions:

600 x 400 mm



## Accessories - DIGITAL FLOOR SCALE

#### Digital floor scale, model BW60 5NL-F (No. 100 560)

With integrated universal filling rail fpr the filling of cartridges and extinguishers.



#### Accessories available at extra charge:

- » Tool box
- » CO<sub>2</sub>-hose 2 m
- » CO<sub>2</sub>-QUICK Adaptor

## TECHNICAL DATA

Weighing range: 60 kg Resolution: 5 g

Dimensions: 510 x 405 mm

#### Digital floor scale, model DFW-OA (No. 100 570)

With integrated universal filling rail for the filling of cartridges and extinguishers.



#### Accessories available at extra charge:

- » Tool box
- » CO<sub>2</sub>-hose 2 m
- » CO<sub>2</sub>-QUICK Adaptor



## **TECHNICAL DATA**

Weighing range: 100 kg
Resolution: 10 g

Dimensions: 600 x 410 mm

## Accessories - SLIDING WEIGHT SCALE

Sliding weight scale, model LW52

(No. 100 590)

#### Accessories available at extra charge:

- » Tool box
- » CO<sub>2</sub>-hose 2 m
- » CO<sub>2</sub>-QUICK Adaptor



## **TECHNICAL DATA**

Weighing range: 52 kg
Resolution: 2 g

Dimensions: 425 x 300 mm

Weight: 35 kg