

**Model PT**

(No. 100 450)

Pneumatic clamping device for CO<sub>2</sub>- and powder extinguishers with pneumatic clamping cylinder.

**Optional available at extra charge:**

» Equipped with adjustable clamping pressure (used for powder extinguisher)



**TECHNICAL DATA**

Dimensions (l x w x h): approx. 300 x 850 x 1000 mm  
 Clamping surface (Ø): 80 – 220 mm  
 Compressed-air: 6 – 8 bar  
 Colour: hammer finish painted blue or silvergrey



**Model PW**

(No. 100 430)

Pneumatic clamping device for powder extinguishers to be mounted on a work bench.

**Optional:** tiltable 360°

**TECHNICAL DATA**

Dimensions (l x w x h): approx. 350 x 750 x 280 mm  
 Clamping surface (Ø): 80 – 220 mm  
 Compressed-air: 6 – 8 bar  
 Colour: hammer finish painted blue or silvergrey

**Model PW-D**

(No. 100 440)

Pneumatic clamping device for powder extinguishers to be mounted on a work bench. The clamping device is tiltable of 360°.

**TECHNICAL DATA**

Dimensions (l x w x h): approx. 350 x 750 x 280 mm  
 Clamping surface (Ø): 80 – 220 mm  
 Compressed-air: 6 – 8 bar  
 Colour: hammer finish painted blue or silvergrey



**Model M**

(No. 100 410)

Quick-action clamping device; manual operation to be mounted on a work bench.

**Optional:** Tilting clamping Device 360°

**TECHNICAL DATA**

Dimensions (l x w x h): approx. 400 x 300 x 240 mm  
Clamping surface (Ø): 80 – 220 mm  
Colour: hammer finish painted blue or silvergrey




**Model M-D**

(No. 100 420)

Quick-action clamping device; manual operation to be mounted on a work bench.

The clamping device is tiltable of 360°.

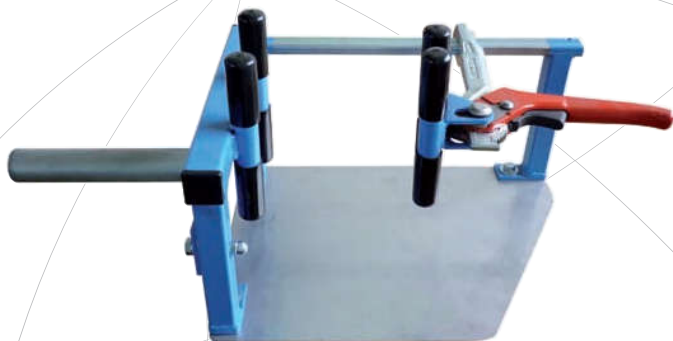

**TECHNICAL DATA**

Dimensions (l x w x h): approx. 400 x 400 x 280 mm  
Clamping surface (Ø): 80 – 220 mm  
Weight: approx. 3kg  
Colour: hammer finish painted blue or silvergrey